


窥口铜接端头

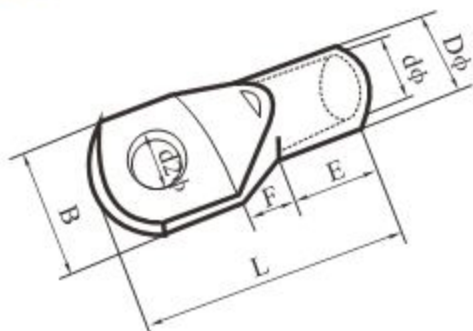

编号 ITEM.No.	螺栓口直径 screw dia. d2(mm)	尺寸 DIMENSION					导线面积 CLNLE SQ
		d φ	D φ	B	E	L	
SC1.5-5	5.2	1.8	3.7	8.0	6.5	16	1.5
SC2.5-4	4.2	2.4	4.0	8.0	7.0	18	2.5
SC2.5-5	5.2			10.0	7.0	20	
SC4-5	5.2	3.1	4.8	10	7.5	20	4
SC4-6	6.5			10	7.5	20	
SC6-5	5.2	3.8	5.5	10	8.0	23	6
SC6-6	6.5			12		23	
SC10-6	6.5	4.5	6.2	12	9.0	25	10
SC10-8	8.4			12	9.0	25	
SC16-6	6.5	5.4	7.1	12	11.0	30	16
SC16-8	8.4			12	11.0	30	
SC25-6	6.5	6.8	8.8	13	13.5	33	25
SC25-8	8.4			18		33	
SC35-8	8.4	8.2	10.6	15.3	14.5	38	35
SC35-10	10.5			18		38	
SC50-8	8.4	9.5	12.4	17.8	17	45	50
SC50-10	10.5			17.8	17	45	
SC70-10	10.5	11.2	14.7	21.0	19.5	50	70
SC70-12	13.0			21.0	19.5	50	
SC95-10	10.5	13.5	17.4	25	23.5	55	95
SC-95-12	13			25	23.5	55	
SC120-12	13	15	19.4	28	26	63	120
SC120-16	17			28	26	63	
SC150-12	13	16.5	21.2	30	29	70	150
SC150-16	17			30	29	70	
SC185-16	17	18.5	23.5	34	33	75	185
SC240-16	17	21	26.5	38	40	90	240
SC240-20	21			38	40	90	
SC300-16	17	23.5	30	43	44	98	300
SC300-20	21			43	44	98	
SC400-16	17	28.5	36.5	50.1	46	110	400
SC400-20	21			50.1	46	110	
SC500-16	17	30	39	56	50	120	500
SC500-20	21			56	50	120	
SC630-20	21	35	45	65	56	140	630
SC800-BL	-	39	50.6	73.5	60	170	800
SC1000-BL	-	43	56.2	81	87	200	1000

Vinyl Wire End Caps

绝缘套管

- 材质：采用高级软质PVC制成。
- 用途：适用于各种配电盘，机械中复杂配线之失色处理，使线路能一目了然。软质弹性使能适合于各种不同形状的端子，使用时著脱容易。
- 特点：电机电子用高级绝缘套管、色泽清晰、光亮、弹性佳、绝缘性良好。

Vinyl Wire End Caps

- Material: Made from PVC.
- Usage: devide the colorful cable in machine, used to various terminals as soft feature, easy to take off.
- Character: clearly color, shine, soft, insulated.
- Color: red white blue yellow ,black green, brown available upon special request.

编 号 ITEM.NO.	适用端子 SQ(mm)	尺寸 DIMENSION		包 装 PACKING
		D1(mm)	D2(mm)	
V-1.25	1.25	3.3	3.1	100PCS
V-2	2	4.5	3.7	
V-3.5	3.5	5.7	4.1	
V-5.5	5.5	5.7	5.2	
V-8	8	7.2	6.2	
V-14	14	10.0	8.0	
V-22	22	12.0	9.5	
V-38	38	14.0	11.8	
V-60	60	16.8	13.5	
V-80	80	19.0	16.0	
V-100	100	22.0	18.0	50PCS
V-125	125	24.0	20.0	
V-150	150	24.4	22.0	
V-200	200	32.0	24.0	25PCS
V-250	250	38.0	26.5	
V-325	325	38.0	29.0	
V-400	400	44.0	37.0	
V-500	500	45.0	40.4	
V-630	630	52.0	45.0	

